

Interconnection Facilities Restudy Report

#635

1,000 MW Wind, Solar & Energy Storage
Gooding, Jerome & Lincoln County, ID

September 12, 2025

OFFICIAL USE ONLY—DO NOT DUPLICATE, DISTRIBUTE, PUBLISH, OR SHARE

This report contains Idaho Power Company Critical Energy Infrastructure Information (CEII). Distribution of this report must be limited to parties that have entered into a non-disclosure agreement with Idaho Power and have a need to know.

Table of Contents

Table of Contents	i
List of Tables	ii
List of Figures	ii
1. Study Overview	1
1.1 Introduction	1
1.2 Study Assumptions.....	1
1.3 No Transmission Service	2
2. Interconnection Facilities and Upgrades	3
2.1 Interconnection Customer’s Interconnection Facilities.....	3
2.2 Transmission Provider’s Interconnection Facilities	5
2.3 Substation Network Upgrades	6
2.4 System Network Upgrades	7
2.5 Distribution Upgrades	7
2.6 Estimated Costs.....	8
3. Contingent Facilities and Affected Systems.....	10
3.1 Generation Interconnection Queue.....	10
3.2 Contingent Facilities and Planned System Improvements	10
3.3 Affected Systems.....	11
4. Estimated Milestones	12
4.1 Milestones Overview	12
4.2 Estimated Milestones Detail	12
5. Interconnection Details.....	16
5.1 Generating Facility	16
5.2 Other Facilities Provided by Interconnection Customer	17
5.3 Operating Requirements.....	19
5.4 Temporary Limited Operations.....	19
5.5 Low Voltage Ride Through	19
5.6 Reactive Power	20
5.7 Generation Interconnection Supervisory Data Requirements	20

Revision History	29
------------------------	----

List of Tables

Table 1	
Transmission Provider Interconnection Facilities	6
Table 2	
Substation Network Upgrades	7
Table 4	
Estimated cost of Interconnection Facilities and Network Upgrades.	9
Table 5	
Identified Contingent Facility Network Upgrades.	10
Table 6	
Contingent Transmission Provider planned system improvements.....	11
Table 7	
Estimated Milestones	13
Table 8	
Transmission-interconnected wind Generation Interconnection Supervisory Data Table.....	22
Table 9	
Transmission-interconnected solar Generation Interconnection Supervisory Data Table.....	24
Table 10	
BESS Generation Interconnection Supervisory Data Table.	26

List of Figures

Figure 1	
Generic Point of Change of Ownership (POCO) configuration.	4

1. Study Overview

1.1 Introduction

[REDACTED] (Interconnection Customer) has an executed Large Generator Interconnection Agreement (LGIA) with Idaho Power Company (IPC) for interconnection of the proposed 1,000 MW [REDACTED] #635 (Project) to IPC's 500kV Midpoint Station. The LGIA is for Network Resource Interconnection Service (NRIS).

Following the Project's execution of the LGIA and subsequent First Amendment to the LGIA, senior-queued Interconnection Request #530's LGIA was terminated. Due to this senior-queued LGIA termination, the Project requires an Interconnection Facilities Restudy (RFS) to be performed. This Interconnection Facilities Restudy Report (RFSR) identifies the work required to interconnect the Project to the requested Point of Interconnection (POI) at IPC's 500kV Midpoint Station.

In accordance with Section 8.2 of IPC's Large Generator Interconnection Procedures (LGIP), this RFSR is specific to the Project and documents the basis for, and results of, the RFS for the Project. The RFSR provides a non-binding estimate of the cost of—and schedule for—equipment, engineering, procurement, and construction work required to connect the Project physically and electrically to the Transmission System. This report satisfies the RFS requirements of IPC's LGIP.

This RFSR is a study and preliminary evaluation only and does not constitute, or form the basis of, a definitive agreement related to the matters described in this RFSR. Unless and until an LGIA amendment is executed by IPC and Interconnection Customer, no party will have any legal rights or obligations, express or implied, related to the subject matter of this RFSR. An LGIA amendment under IPC's Open Access Transmission Tariff (OATT) between Interconnection Customer and IPC for the Project will be prepared following finalization of this RFSR. The LGIA amendment will be a definitive agreement that contains terms and conditions that supersede this RFSR.

1.2 Study Assumptions

- For NRIS, additional studies to reduce or eliminate congestion may be required, and these studies may identify the need for additional upgrades. To the extent Interconnection Customer enters an arrangement for long term transmission service for deliveries from the Large Generating Facility to any point outside IPC's Transmission System, such request may require additional studies and upgrades for IPC to grant such request.
- Senior-queued Interconnection Requests that were considered in this study are listed in Section 3.1. If any of these Interconnection Requests are withdrawn, IPC reserves the right to restudy this Project and the results and conclusions could significantly change.

- The following IPC planned system improvements were assumed in service:
 - Boardman to Hemingway 500kV transmission line (2027)
 - 50% series capacitance compensation on the Kinport to Midpoint 345kV transmission line (2026)
 - Midpoint Substation transformer T502 500:345kV transformer (2026)
 - Hemingway to Bowmont 230kV transmission line (2026)
 - Bowmont to Hubbard 230kV transmission line (2026)
 - Both phases of the Hemingway to Midpoint 500kV transmission line:
 - Phase 1: Hemingway to Mayfield 500kV transmission line (2028)
 - Phase 2: Mayfield to Midpoint 500kV transmission line (2030)
- This report is based on information available at the time of study. Interconnection Customer is responsible to check IPC's OASIS site and website regularly for Generation Interconnection and Transmission System updates:
 - OASIS (<https://www.oasis.oati.com/ipco/>)
 - Planning and Electrical Projects (<https://www.idahopower.com/energy-environment/energy/planning-and-electrical-projects/>)

1.3 No Transmission Service

This RFSR is a study of a request for NRIS as defined in Section 1 of IPC's LGIP. This RFSR identifies the facilities necessary to provide such service. NRIS in and of itself does not convey any right to transmission service or to deliver electricity to any specific customer or Point of Delivery.

The battery energy storage system (BESS) component of this Project was not studied for grid-charging.

2. Interconnection Facilities and Upgrades

2.1 Interconnection Customer's Interconnection Facilities

General Facility Description

The proposed Project will consist of [REDACTED] wind-powered generating facility; [REDACTED] solar-powered generating facility; and [REDACTED] BESS in Gooding, Jerome, and Lincoln Counties, Idaho and will interconnect at 500kV at [REDACTED] POIs at IPC's Midpoint Station ([REDACTED]). The net Project output at the POIs as studied is 1,000 MW.

Interconnection Customer's Interconnection Facilities are defined in Section 1 of IPC's LGIP as all facilities and equipment located between the Generating Facility and the Points of Change of Ownership (POCO), including any modification, addition, or upgrades to such facilities and equipment. Interconnection Customer is responsible for funding and constructing Interconnection Customer's Interconnection Facilities, including the gen-tie lines and facilities to the POCOs.

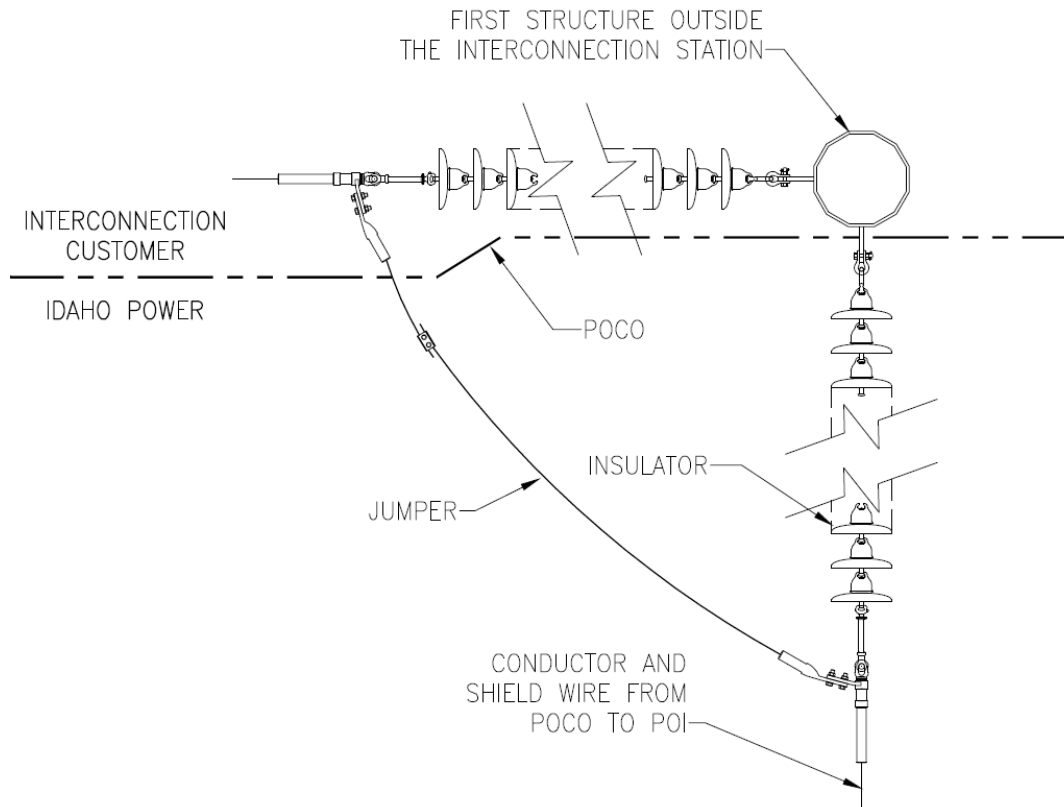
The Project is located in IPC's [REDACTED] region in Township [REDACTED], Range [REDACTED], and Section [REDACTED] and is approximately [REDACTED] away from Transmission Provider's Interconnection Facilities (IPC's Interconnection Facilities). Interconnection Customer will install disconnect switches, collector system, transformers, controllers, appropriate grounding measures, and associated auxiliary equipment.

Interconnection Customer's [REDACTED] main step-up transformers are [REDACTED] transformers. The proposed [REDACTED] transformers specified in the Interconnection Request should provide an adequate ground return path for transmission line protection/relaying.

Interconnection Customer will build facilities from its project to the POCOs, including [REDACTED] transmission lines with a minimum 24-count optical ground wire (OPGW) from the Generating Facility to the POCO. Interconnection Customer is responsible to mirror IPC's System Protection relays to include dual SEL-411L installation for protection of the interconnection intertie.

Point of Change of Ownership

The POCOs for the Project will be at the first structures outside IPC's northwest section of the 500kV Midpoint Station (POI Station). The POCO structures will be part of Interconnection Customer's Interconnection Facilities. The jumper will be part of IPC's Interconnection Facilities. The following drawing provides generic information and standard requirements for the POCOs.

**Figure 1**

Generic Point of Change of Ownership (POCO) configuration.

Note the following related to the POCOs:

- The first structures outside the POI Station shall be designed as follows:
 - 90-degree max line angle
 - Steel
 - IPC phase spacing
- Interconnection Customer's OPGW shall terminate at an Interconnection Customer-provided splice box on the structure.
- Interconnection Customer shall inform IPC of the conductor size terminated at the POCO structures.
- IPC and Interconnection Customer shall coordinate phase configuration (e.g., 321, 213, etc.) terminated at the POCO structures.
- Jumper and insulator parts shown in the diagram are for representation only; actual materials used will be dependent on final design.

2.2 Transmission Provider's Interconnection Facilities

Transmission Provider's Interconnection Facilities (IPC's Interconnection Facilities) are defined in Section 1 of IPC's LGIP as all facilities and equipment owned, controlled, or operated by IPC from the POCO to the POI, including any modifications, additions, or upgrades to such facilities or equipment. In accordance with Section 4.2.1 of IPC's LGIP, costs for IPC's Interconnection Facilities are directly assigned to Interconnection Customer and are not reimbursable.

Point of Interconnection

The Project's POIs will be at Interconnection Customer's requested POI of IPC's 500kV Midpoint Station. The preliminary configuration for the POIs is in the [REDACTED] 500kV Midpoint Station at the node connection between air-break switches [REDACTED] as well as at the node connection between air-break switches [REDACTED]. Drawings detailing the configuration are attached as Exhibit 1 and 2. This configuration will be finalized during construction, and the final configuration will be captured in an LGIA amendment, if necessary.

Metering

All metering for the Project will be installed, configured, and maintained in accordance with IPC's publicly posted [Facility Interconnection Requirements for Transmission Systems](#), as may be updated from time to time.

IPC's Interconnection Facilities

To allow interconnection of the Project, IPC will install the following facilities up to the POCOs:

- [REDACTED] meters
- [REDACTED] steel dead-end structures
- [REDACTED] air-break switches
- [REDACTED] current transformers (CT)
- Required foundations, bus, bus supports, and fiber communication equipment
- The last span of the Project's gen-tie line, including insulators, conductor, and associated hardware

IPC will install equipment to collect and transmit Phasor Measurement Unit (PMU) data to IPC. The communication circuits required for this data transmission are described in Section 5.2 of this RFSR. The data can be made available to Interconnection Customer on request.

Table 1
Transmission Provider Interconnection Facilities

Facility Description	Unloaded Cost Estimate
Interconnection Facilities	\$3,665,631

2.3 Substation Network Upgrades

Substation Network Upgrades are defined in Section 1 of IPC's LGIP as Network Upgrades that are required at the substation located at the POI; this includes all switching stations. This section includes both Substation Stand Alone Network Upgrades (SANU) and Substation Network Upgrades, the actual costs of which are reimbursable.

Substation Stand Alone Network Upgrades

SANUs are defined in Section 1 of IPC's LGIP as Network Upgrades that Interconnection Customer may construct without affecting day-to-day operations of the Transmission System during their construction.

No Substation SANUs were identified for this Project.

Substation Network Upgrades

The following Substation Network Upgrades are required for this Project:

- Expand the [REDACTED] existing 500kV Midpoint Station
 - [REDACTED] expand the existing yard by approximately [REDACTED]
 - New [REDACTED] control building
 - Relocate and expand [REDACTED] line bay
 - [REDACTED] steel dead-end structures
 - [REDACTED] circuit breakers
 - [REDACTED] zero-crossing breakers
 - [REDACTED] air-break switches
 - [REDACTED] capacitance-coupled voltage transformers (CCVT)
 - Associated bus supports, foundations, relaying, fiber, communications, Digital Fault Recorder (DFR), and control equipment in the station yard and building

- Relocate the existing [REDACTED] capacitor bank and reactors from the existing line bay to the new and relocated [REDACTED] line bay.

Table 2
Substation Network Upgrades

Facility Description	Unloaded Cost Estimate
POI Station	\$89,747,381

2.4 System Network Upgrades

System Network Upgrades are defined in Section 1 of IPC's LGIP as Network Upgrades that are required beyond the substation located at the POI. This section includes both System SANU and System Network Upgrades, the actual costs of which are reimbursable.

System Stand Alone Network Upgrades

SANUs are defined in Section 1 of IPC's LGIP as Network Upgrades that Interconnection Customer may construct without affecting day-to-day operations of the Transmission System during their construction.

No System SANUs were identified for this Project.

System Network Upgrades

No System Network Upgrades were identified for this Project.

Additional Studies

Based on Interconnection Customer's request to connect wind generators to an IPC substation that contains series compensated transmission lines, a separate Sub-Synchronous Control Interaction (SSCI) Study will be required to determine the mitigation requirements for identified sub-synchronous resonances and sub-synchronous interactions. Interconnection Customer is responsible for implementing solutions to eliminate the possibility of SSCI events up to and including tripping the wind generation component of the Project offline.

The study will be performed as LGIA milestone and may result in additional System Network Upgrades.

2.5 Distribution Upgrades

Distribution Upgrades are defined in Section 1 of IPC's LGIP as additions, modification, and upgrades to IPC's Distribution System at or beyond the POI to facilitate interconnection of the Generating Facility. In accordance with Article 11.3 of IPC's LGIA, costs for Distribution Upgrades are directly assigned to Interconnection Customer and are not reimbursable.

Note that the identified Distribution Upgrades do not include distribution facilities to support local service to Interconnection Customer's Interconnection Facilities, Generating Facility,

auxiliary load, etc. See the Local Service portion of Section 5.2 of this RFSR for additional information on local service requirements.

No Distribution Upgrades were identified for this Project.

2.6 Estimated Costs

The following good faith estimates are provided in 2025 US dollars and are based on a number of assumptions and conditions. IPC does not warrant or guarantee the estimated costs in the table below, which are estimates only and are subject to change. Interconnection Customer will be responsible for all actual costs incurred in connection with the work performed by IPC and its agents for the scope identified in the ultimate LGIA and subsequent amendments, under the terms and subject to the conditions included in any LGIA and subsequent amendments executed by IPC and Interconnection Customer for this Project. Costs for work being performed by Interconnection Customer and/or Affected Systems are not included.

The estimated cost below is required to be paid in full by Interconnection Customer, or other arrangements acceptable to IPC are made with IPC's Credit Department, in accordance with Article 11.5 of the LGIA prior to IPC commencing construction of a discrete portion of IPC's Interconnection Facilities or Network Upgrades.

There are identified contingent planned system improvements that are required to be completed prior to the interconnection of this Project. Details on the contingent facilities identified are in section 3.2 of this RFSR. For this and other reasons, the cost estimates included in this RFSR are estimates only, are based on currently known or assumed facts that may not be accurate or materialize, and are subject to change.

Table 4

Estimated cost of Interconnection Facilities and Network Upgrades.

Description	Ownership	Cost Estimate
IPC Interconnection Facilities:		
Facilities between the POCO and POI as described in Section 2.2	IPC	\$3,665,631
Contingency 20%		\$733,126
Overheads 4%		\$175,950
<i>Total</i>		\$4,574,707
Substation Network Upgrades:		
Upgrades to POI Station as described in Section 2.3	IPC	\$89,747,381
Contingency 20%		\$17,949,476
Overheads 4%		\$4,307,874
<i>Total</i>		\$112,004,731
GRAND TOTAL¹		\$116,579,439

¹ Funding responsibility is described in the standard LGIA in Idaho Power's OATT (Attachment M). Interconnection Facilities are funded by the Interconnection Customer without reimbursement. Distribution Upgrades are funded by the Interconnection Customer without reimbursement. Network Upgrades are funded by the Interconnection Customer, and those funds are eligible for reimbursement under LGIA section 11.4.1.

3. Contingent Facilities and Affected Systems

3.1 Generation Interconnection Queue

Interconnection Customer has applied to interconnect the Project to IPC's transmission system for an injection of 1,000 MW total at [REDACTED] POIs at IPC's Midpoint 500kV Station. IPC jointly owns this station with PacifiCorp (PAC).

If a senior-queued Interconnection Request that is responsible for constructing Network Upgrades should withdraw from the queue or otherwise be terminated, junior-queued Interconnection Requests in the electrically relevant area may be restudied and assigned additional Network Upgrades identified as necessary to facilitate their interconnection.

As of the date of this report, Interconnection Requests #551, #557, #558, #570/587, #590, #604, #605, #614/616, #624, #625, #630, #632, and #633 are senior-queued Interconnection Requests to the Project. Costs related to Network Upgrades could be passed on to the Project should changes be made to one or more of these senior-queued Interconnection Requests.

3.2 Contingent Facilities and Planned System Improvements

Contingent Facilities

Contingent Facilities are defined in Section 1 of IPC's LGIP as those unbuilt Interconnection Facilities and Network Upgrades upon which the Interconnection Request's costs, timing, and study findings are dependent, and if delayed or not built, could cause a need for restudies of the Interconnection Request or a reassessment of the Interconnection Facilities and/or Network Upgrades and/or costs and timing.

The following table details the identified Contingent Facilities associated with GI #570 that are required to be completed prior to the interconnection of this Project.

Table 5
Identified Contingent Facility Network Upgrades.

Assigned To	Contingent Facility	Outage	Estimated In-Service
GI #570	[REDACTED]	N/A	2030

Contingent Transmission Provider Planned System Improvements

The following table details the identified contingent IPC planned system improvements that are required to be completed prior to the interconnection of this Project, as identified in the Limited Operations Study dated March 21, 2024.

Table 6

Contingent Transmission Provider planned system improvements.

Planned System Improvement	Estimated In-Service
Boardman to Hemingway 500kV transmission line	2027
50% series capacitance compensation on the Kinport to Midpoint 345kV transmission line	2026
Midpoint Substation transformer T502 500:345kV transformer	2026
Bowmont to Hemingway 230kV transmission line	2026
Bowmont to Hubbard 230kV transmission line	2026
Hemingway to Mayfield section of the Hemingway to Midpoint 500kV transmission line	2028
Mayfield to Midpoint section of the Hemingway to Midpoint 500kV transmission line	2030

3.3 Affected Systems

Affected System is defined in Section 1 of IPC's LGIP as an electric system other than IPC's Transmission System that may be affected by the proposed interconnection.

Because the proposed interconnection is to the Midpoint 500kV station, which is jointly owned by IPC and PAC, PAC is an Affected Party. While PAC previously confirmed that they do not anticipate any impacts to PAC requiring mitigation, a copy of this report will be shared with PAC, and an Affected System Study may be required. If an Affected System Study is required, Interconnection Customer will work directly with PAC to complete the necessary study.

4. Estimated Milestones

4.1 Milestones Overview

The milestone dates in this section assume, among other things, that materials can be timely procured, labor resources are available, and that outages to the existing transmission system are available to be scheduled. Additionally, there are several matters, such as permitting issues and the performance of subcontractors that are outside the control of IPC that could delay the estimated Commercial Operation Date (COD). For purposes of example only, federal, state, or local permitting, land division approval, identification of Interconnection Facilities location, access to proposed Interconnection Facilities location for survey and geotechnical investigation, coordination of design and construction with Interconnection Customer, failure of IPC's vendors to timely perform services or deliver goods, and delays in payment from Interconnection Customer may result in delays of any estimated milestone and the COD of the Project. To the extent any of the foregoing satisfy the definition of Force Majeure hereunder, they shall be deemed Force Majeure events. For these and other reasons, IPC does not warrant or guarantee the estimated milestone dates, which are estimates only.

In the event Interconnection Customer is unable to meet the dates as outlined in the ultimate LGIA and any subsequent amendments, Interconnection Customer may request suspension of up to a total of three years pursuant to Article 5.16 of the LGIA. Upon suspension of work pursuant to Article 5.16 of the LGIA, the applicable construction duration, timelines, and schedules set forth in the ultimate LGIA and any subsequent amendments shall be likewise suspended. The estimated milestones in the following table may be updated and revised for inclusion in the LGIA in light of subsequent developments and conditions.

4.2 Estimated Milestones Detail

Interconnection Customer has requested a COD of December 31, 2029. IPC has developed the milestone dates in good faith considering many factors, including the requested COD, known long-lead times, and the schedule of other in-progress projects. The estimated milestone schedule captured in the following table does not align with the requested COD.

These milestones will begin, and the milestone schedule referenced below will only be valid, upon receipt of funding from Interconnection Customer or its authorized third party no later than the date set forth in the ultimate LGIA and any subsequent amendments for such payment. IPC will not commit any resources toward Project construction that have not been funded by Interconnection Customer. Additionally, failure by Interconnection Customer to make the required payments as set forth in the ultimate LGIA and any subsequent amendments by the specified date(s) may result in the loss of milestone dates and construction schedules set forth below.

Table 7
Estimated Milestones

Estimated Date	Responsible Party	Milestone
[REDACTED]	Interconnection Customer	Complete Construction funding or arrangements acceptable to IPC made with IPC's Credit Department
June 13, 2023	Interconnection Customer	Complete LGIA Executed
[REDACTED]	Interconnection Customer	Complete Provide required documentation: - Reasonable evidence to show one or more of the development milestones as per LGIP Section 11.3 has been achieved - Notice to Proceed
[REDACTED]	Interconnection Customer	Complete Provide required documentation: - Site Control - Certificate of Insurance
[REDACTED]	Interconnection Customer	Complete Adjusted construction funding or arrangements acceptable to IPC are made with IPC's Credit Department for amended amount
[REDACTED]	Interconnection Customer	Project placed in Suspension
[REDACTED]	Interconnection Customer	Complete LGIA First Amendment Execution
15 Business Days following receipt of final LGIA Second Amendment	Interconnection Customer	LGIA Second Amendment Execution
No later than 3 years following Suspension	Interconnection Customer	Project Re-Initiation Provide required documentation: - Unsuspend LGIA - Updated construction funding or arrangements acceptable to IPC made with IPC's Credit Department
12 months following Project Re-Initiation	Interconnection Customer	Easements and permits procured for station expansion; construction will not begin until easements and permits are in place
24 months following Project Re-Initiation	IPC	Engineering and Design complete
47–66 months after payment milestone 2 received ²	IPC	Long Lead Material procured/received

² Construction cannot be complete until long-lead items are received.

Estimated Date	Responsible Party	Milestone
18 months prior to COD	Interconnection Customer	Provide updated EMT models to complete modeling in accordance with IPC's OATT Attachment O and to perform the required SSCI study (Additional Studies in Section 2.4)
8 months prior to Commissioning of IPC's Interconnection Facilities and Network Upgrades	IPC	Network modeling submission Failure to submit by given lead time will result in Project delay
180 Calendar Days prior to Initial Synchronization	Interconnection Customer	Provide a completed copy of the Large Generating Facility data requirements contained in Appendix 1 of the LGIP per LGIA Article 24.3
180 Calendar Days prior to Initial Synchronization	Interconnection Customer	Provide initial specifications for Interconnection Customer's Interconnection Facilities per LGIA Article 5.10.1
90 Calendar Days prior to Initial Synchronization	Interconnection Customer	Provide final specifications for Interconnection Customer's Interconnection Facilities per LGIA Article 5.10.1
3 months prior to Initial Synchronization	Interconnection Customer	Provide notification of local Balancing Authority per LGIA Article 9.2
2030	IPC	Identified Contingent Facility Network Upgrades in service (Table 5)
2030	IPC	All identified contingent Transmission Provider planned system improvements completed (Table 6)
59 months following Project Re-Initiation	IPC	Construction of IPC's Interconnection Facilities and Network Upgrades Complete
1 month following completion of all previous construction milestones	IPC	Commissioning of IPC's Interconnection Facilities and Network Upgrades Complete Back feed power is available
Any time after Commissioning Complete Note: Switching request must be made a minimum of 5 days prior to In-Service Date	Interconnection Customer	In-Service Date Switch at the POI can be closed to obtain back feed power
TBD	Interconnection Customer	Initial Synchronization Date Interconnection Customer Trial Operation begins; test energy can be generated only if the IC has arranged for the delivery of such energy
30 Calendar Days prior to COD	Interconnection Customer	Notify IPC of COD
Prior to COD	Interconnection Customer	Pass Generating Facility Functional Testing
Prior to COD	Interconnection Customer	Provide as-built or as-tested performance data that differs from the initial Large Generating Facility data requirements contained in Appendix 1 of the LGIP per LGIA Article 24.4
TBD	Interconnection Customer	COD

Estimated Date	Responsible Party	Milestone
Within 30 Calendar Days following COD	Interconnection Customer	Submit completed Appendix E of the LGIA confirming completion of Trial Operation and COD
120 Calendar Days following COD	Interconnection Customer	Provide as-built drawings, information, and documents for Interconnection Customer's Interconnection Facilities per LGIA Article 5.10.3
120 Calendar Days following COD	IPC	Provide as-built drawings and data to Interconnection Customer upon request per LGIA Article 5.11

5. Interconnection Details

5.1 Generating Facility

The Generating Facility is defined in Section 1 of IPC's LGIP as Interconnection Customer's device(s) for the production and/or storage for later injection of electricity identified in the Interconnection Request but shall not include Interconnection Customer's Interconnection Facilities.

Interconnection Customer's system will be constructed as follows:

1. The wind generation system will comprise of [REDACTED] wind turbines. [REDACTED] turbines [REDACTED] will be connected at each of the [REDACTED] transformers.
2. The solar generation system will comprise of [REDACTED] inverters. [REDACTED] inverters will be connected at each of the [REDACTED] transformers.
3. The BESS system will comprise of [REDACTED] inverters [REDACTED] will be connected at each of the [REDACTED] transformers.
4. A plant controller will be used to control the inverter system and to implement smart inverter functionality for operating the Project within a voltage range specified by IPC at the POI.

The above-referenced inverters, or equivalent inverters that have the same specifications and functionality as stated above, must be utilized. Additional study and/or equipment may be necessary if a different inverter is utilized that has different specifications and functionality than that which was studied.

Operating Assumptions for Battery Energy Storage System

Interconnection Customer has stated the Project is not intended to charge the BESS portion of the Project from the grid. Interconnection Customer will be required to demonstrate operating procedures and control measures that prevent the BESS from grid charging. Additionally, IPC shall enable an additional relay setting at the POI to trip the Project if grid-charging is detected.

If Interconnection Customer intends to charge the BESS via Idaho Power's transmission system in the future, an additional BESS grid-charging study would be required to be performed to determine specific requirements for allowing the BESS to charge via Idaho Power's transmission system prior to the BESS charging from the transmission system.

5.2 Other Facilities Provided by Interconnection Customer

Telecommunications

Interconnection Customer is not responsible for any third-party communication circuits for IPC's Interconnection Facilities. Any additional telecommunication requirements, including OPGW on the gen-tie line, will be the sole responsibility of Interconnection Customer.

Ground Fault Equipment

Interconnection Customer will install transformer configurations that will provide a ground source to the transmission system.

Generator Output Limit Control

Interconnection Customer will install equipment to receive/transmit signals from IPC Load Serving Operations for Generation Output Limit Control (GOLC)—see Section 5.5 of this RFSR. IPC's recommended method of communication for GOLC is via fiber between the POI and the Project.

Local Service

Interconnection Customer is required to take local service from the local service provider as a retail customer. Interconnection Customer is responsible to arrange for local service to Interconnection Customer's Interconnection Facilities and/or Generating Facility.

If receiving local service from IPC, Interconnection Customer shall coordinate such requirements with IPC so that local service can be provided in accordance with the provisions contained within the applicable service schedule. The service schedule and functional settlement will be determined during construction of the Project.

Property

Interconnection Customer may be required to obtain transmission easements and/or transmission line crossing agreements from IPC depending on the designed path of Interconnection Customer's [REDACTED] gen-tie lines.

This project will require expansion of the [REDACTED] Midpoint Station 500kV yard. This expansion will require approximately [REDACTED] of land. The land is currently owned by IPC, and no property purchase is anticipated to accommodate this project. However, easements and permits associated with the expansion will be required and may impact the cost and timing of the project.

IPC's Interconnection Facilities and associated substation will be owned and maintained by IPC.

Site Work

Site work is required for Network Upgrades on property already owned by IPC, and IPC will perform the site work.

Monitoring Information

If Interconnection Customer requires the ability to monitor information related to the IPC breaker/relay (i.e., Mirrored Bits) in the POI Station, Interconnection Customer is required to supply its own communications circuit to the POCO. The fiber communication circuit used for GOLC is acceptable.

Meteorological Data

To integrate the wind energy into IPC's system, Interconnection Customer will provide weather data to IPC from the Project site or from a location within two miles of the Project site. This data must consist of the following near real-time weather parameters that will be collected via each meteorological observation tower at ten (10) meters and eighty (80) meters above ground:

1. Wind Speed (miles/seconds)
2. Wind Direction
3. Air Temperature (degrees Centigrade)
4. Relative Humidity
5. Barometric Pressure

This data shall be provided to IPC hourly via commonly accepted electronic web service standards or similar communication method. Specific meteorological data must also be provided to IPC via the telemetry circuit as identified in Section 5.5 of this RFSR. Interconnection Customer will provide relevant historical meteorological data to IPC. Additionally, Interconnection Customer shall submit to IPC the physical and technical specifications for all meteorological measurement devices, geographic locations, and technical specifications of all turbines. The associated cost for obtaining this data is Interconnection Customer's responsibility and is therefore not included in the Facility Study estimate.

To integrate the solar energy into IPC's system and operate IPC's solar forecasting tool, Interconnection Customer must provide solar irradiation and weather data from the Project's physical location to IPC via real-time telemetry in a form acceptable to IPC. The associated cost for obtaining this data is Interconnection Customer's responsibility.

The data must be provided at ten (10)-second intervals and consist of:

1. Global Horizontal Irradiance
2. Plane of Array Irradiance
3. Ambient Temperature
4. Wind Speed and Wind Direction

5. Relative Humidity

The installed instruments must equal or exceed the specifications of the following instruments:

- **Temperature and Relative Humidity:** R.M Young Relative Humidity and Temperature Probe Sensors Model 41382
- **Wind:** R.M Young Wind Monitor Model 05103
- **Pyranometer:** Apogee Instruments Model SP-230

Generator Technical Information and Drawings

During Project design development, Interconnection Customer shall provide draft design prints containing technical information, including but not limited to impedances and equipment brand and models. After construction, Interconnection Customer shall submit to IPC all the as-built information, including prints with the latest approved technical information and commissioning test results in accordance with the timing requirements outlined in the LGIA and any subsequent amendments.

5.3 Operating Requirements

To maintain compliance with NERC Reliability Standard FAC-001, the Project is required to comply with IPC's publicly posted [Facility Interconnection Requirements for Transmission Systems](#), as may be updated from time to time.

The Project is required to comply with the applicable Voltage and Current Distortion Limits found in IEEE Standard 2800-2022 *IEEE Standard for Interconnection and Interoperability of Inverter-Based Resources (IBRs) Interconnecting with Associated Transmission Electric Power Systems*, or any subsequent standards as they may be updated from time to time.

5.4 Temporary Limited Operations

The Project's current GIA includes the results of the Limited Operations Study that was previously performed to evaluate the Project's ability to come online prior to the new Hemingway to Midpoint 500kV line going into service. Due to the timing changes resulting from the suspension of the Project, IPC has assumed responsibility for the initial expansion of Midpoint and build out [REDACTED] to meet IPC's in-service date of 2030 for the Mayfield to Midpoint section of the new Hemingway to Midpoint 500kV line. The Project will continue to be contingent on both phases of the new Hemingway to Midpoint 500kV line. The Project is physically unable to interconnect prior to the buildout of Midpoint Station for the new Hemingway to Midpoint 500kV line, so the results of the previously performed Limited Operations Study are no longer valid.

5.5 Low Voltage Ride Through

The Project must be capable of riding through faults on adjacent sections of the power system without tripping due to low voltage. Interconnection projects must meet or exceed the low

voltage ride-through requirements as set forth in NERC Reliability Standard PRC-024 and PRC-029, when effective.

Frequency Response Requirements

To the extent the Project has operating capability in the needed direction, the Project must be capable of providing Primary Frequency Response for both positive and negative frequency deviations from 60Hz (+/- 0.036 Hz) with a droop of up to 5% for Bulk Electric System disturbances. Provided the Project meets the above Primary Frequency Response requirements, IPC shall not curtail the Project when such curtailments are caused by a need to comply with applicable Frequency Response reliability standards.

Momentary Cessation Requirements

Momentary cessation should not be used within the voltage and frequency ride-through curves specified in PRC-024 and PRC-029, when effective. Use of momentary cessation is not considered ride through within the No Trip zone curves of PRC-024 or mandatory and continuous operation regions of PRC-029. The use of momentary cessation should be eliminated to the extent possible consistent with NERC's *Reliability Guideline for BPS-Connected Inverter-Based Resource Performance*.

Interconnection Customer will be able to modify power plant facilities on Interconnection Customer side of the POCO only if 1) there is no impact on the operation of the transmission or distribution system, 2) the generation facilities are electrically isolated from the system via the [REDACTED] air-break switches, and 3) a terminal clearance is issued by IPC's Load Serving Operator.

5.6 Reactive Power

The Project will be required to provide reactive power versus real power capability measured at the high side of the main power transformer that complies with IEEE 2800-2022 *IEEE Standard for Interconnection and Interoperability of Inverter-Based Resources (IBRs) Interconnecting with Associated Transmission Electric Power Systems*, or any subsequent standards as they may be updated from time to time.

The Project must have equipment capable of receiving an analog setpoint, via DNP 3.0 from IPC for Voltage Control. IPC will issue an operating voltage schedule for the Project prior to the Project's In-Service Date. For more detail, see Section 5.5 of this RFSR.

5.7 Generation Interconnection Supervisory Data Requirements

Interconnection Communications

All supervisory data points described in this Section 5.5 of the RFSR are to be communicated between Interconnection Customer and IPC via serial DNP 3.0 protocol. The physical transport will be fiber cables.

Interconnection Customer is responsible for this fiber connection from their PLC or other controls equipment to the POCO.

Generator Output Limit Control

The Project will be subject to reductions directed by IPC Load Serving Operations during transmission system contingencies and other reliability events. When these conditions occur, the Project will be subject to Generator Output Limit Control (GOLC) and will have equipment capable of receiving an analog setpoint via DNP 3.0 from IPC for GOLC. GOLC will be accomplished with a setpoint and discrete output control from IPC to the Project indicating maximum output allowed.

IPC requires interconnected Projects to accept GOLC signals from IPC's energy management system (EMS) when they are connected to IPC's transmission system.

The GOLC signals will consist of four points shared between the IPC EMS (via the IPC RTU) and Interconnection Customer Generator Controller (SGC). The IPC RTU will be the master, and the SGC will be the slave.

- **GOLC Setpoint:** An analog output that contains the MW value Interconnection Customer should curtail to, should a GOLC request be made via the GOLC On/Off discrete output Control point.
- **GOLC Setpoint Feedback:** An analog input feedback point must be updated (to reflect the GOLC setpoint value) by the SGC upon the SGC's receipt of the GOLC setpoint change with no intentional delay.
- **GOLC On/Off:** A discrete output (DO) control point with pulsing Trip/Close controls. Following a GOLC On control (DNP Control Code: Close/Pulse On), the SGC will run power output back to the MW value specified in the GOLC Setpoint. Following a GOLC Off control (DNP Control Code: Trip/Pulse On), Interconnection Customer is free to run to maximum output.
- **GOLC On/Off Feedback:** A discrete input (DI) feedback point must be updated to reflect the last GOLC DO Control Code received by the SGC upon the SGC's receipt of the GOLC DO control with no intentional delay. The feedback DI should latch to an OFF state following the receipt of a GOLC OFF control and it should latch to an ON state following the receipt of an GOLC ON control.

If a GOLC control is issued, it is expected to see MW reductions start within 1 minute and plant output to be below the GOLC Setpoint value within ten (10) minutes.

Voltage Control

IPC requires interconnected Projects to accept voltage control signals from IPC's EMS when they are connected to IPC's transmission system.

The voltage control will consist of one setpoint and one feedback point shared between the IPC EMS and the SGC.

- **Voltage Control Setpoint:** An analog output that contains the voltage Interconnection Customer should target for plant operation. This setpoint will have a valid control range between 0.95 and 1.05 per unit (p.u.) of nominal system voltage.
- **Voltage Control Setpoint Feedback:** An analog input feedback point must be updated to reflect the Voltage Control Setpoint by the SGC upon the SGC's receipt of the voltage setpoint change with no intentional delay.

The control will always be active; there is no digital supervisory point like the GOLC On/Off control above.

The voltage control system should operate at the voltage indicated by the voltage control setpoint with an accuracy of +/- 0.5%.

Interconnection Customer should supervise this control by setting up reasonability limits (i.e., configure a reasonable range of values for this control to be valid). As an example, they will accept anything in the valid control range (between 0.95 and 1.05 p.u.) but reject values outside this range. If they were fed an erroneous value outside the valid range, their control system would default to the last known, good value.

Auxiliary Data Points

Additional status points relating to local weather, equipment, and other supervisory information are required in accordance with the following Generation Interconnection Supervisory Data Table. This table includes a comprehensive list of data points to be sent and received via the fiber connection described in the Interconnection Communications portion of this Generation Interconnection Supervisory Data Requirements section of the RFSR.

Table 8

Transmission-interconnected wind Generation Interconnection Supervisory Data Table.

Digital Inputs to IPC (DNP Obj. 01, Var. 2)			
Index	Description	State (0/1)	Comments:
0	GOLC Off/On (Control Feedback)	Off/On	Feedback provided by Interconnection Customer
1	52A Interconnection Customer Main Breaker (if present)	Open/Closed	Sourced at substation
2	52A Interconnection Customer Capacitor Breaker (if present)	Open/Closed	Sourced at substation

Digital Outputs to Interconnection Customer (DNP Obj. 12, Var. 1)		
Index	Description	Comments:
0	GOLC Off/On	Control issued by IPC
1	EMS COMM Off/On	Control issued by IPC

Analog Inputs to IPC (DNP Obj. 30, Var. 2)							
Index	Description	Raw High	Raw Low	EU High	EU Low	EU Units	Comments:
0	GOLC Setpoint Value Received (Feedback)	32767	-32768	TBD	TBD	MW	Provided by Interconnection Customer
1	Voltage Control Setpoint Value Rec'd (Feedback)	32767	-32768	TBD	TBD	kV	Provided by Interconnection Customer
2	Maximum Park Generating Capacity	32767	-32768	TBD	TBD	MW	Provided by Interconnection Customer
3	Ambient Temperature	32767	-32768	327.67	-327.68	DEG C	Provided by Interconnection Customer
4	Wind Direction	32767	-32768	327.67	-327.68	Deg from North	Provided by Interconnection Customer
5	Wind Speed	32767	-32768	327.67	-327.68	M/S	Provided by Interconnection Customer
6	Relative Humidity	32767	-32768	TBD	TBD	%	Provided by Interconnection Customer
7	SPARE						
8	SPARE						
9	Number of Turbines in High Speed Cutout	32767	-32768	32767	-32768	Units	Provided by Interconnection Customer
10	SPARE						
11	SPARE						
12	SPARE						
13	SPARE						
14	SPARE						
15	SPARE						
16	SPARE						

Analog Inputs to IPC (DNP Obj. 30, Var. 2)							
Index	Description	Raw High	Raw Low	EU High	EU Low	EU Units	Comments:
17	SPARE						

Analog Outputs to Interconnection Customer (DNP Obj. 41, Var. 2)							
Index	Description	Raw High	Raw Low	EU High	EU Low	EU Units	Comments:
0	GOLC Setpoint	32767	-32768	TBD	TBD	MW	Control issued by IPC
1	Voltage Control Setpoint	32767	-32768	TBD	TBD	kV	Control issued by IPC
2	SPARE						
3	SPARE						
4	SPARE						
5	SPARE						
6	SPARE						
7	SPARE						
8	SPARE						
9	SPARE						

Table 9

Transmission-interconnected solar Generation Interconnection Supervisory Data Table.

Digital Inputs to IPC (DNP Obj. 01, Var. 2)			
Index	Description	State (0/1)	Comments:
0	GOLC Off/On (Control Feedback)	Off/On	Feedback provided by Interconnection Customer
1	52A Interconnection Customer Main Breaker (if present)	Open/Closed	Sourced at substation
2	52A Interconnection Customer Capacitor Breaker (if present)	Open/Closed	Sourced at substation

Digital Outputs to Interconnection Customer (DNP Obj. 12, Var. 1)		
Index	Description	Comments:
0	GOLC Off/On	Control issued by IPC
1	EMS COMM Off/On	Control issued by IPC

Analog Inputs to IPC (DNP Obj. 30, Var. 2)							
Index	Description	Raw High	Raw Low	EU High	EU Low	EU Units	Comments:
0	GOLC Setpoint Value Received (Feedback)	32767	-32768	TBD	TBD	MW	Provided by Interconnection Customer
1	Voltage Control Setpoint Value Rec'd (Feedback)	32767	-32768	TBD	TBD	kV	Provided by Interconnection Customer
2	Maximum Park Generating Capacity	32767	-32768	TBD	TBD	MW	Provided by Interconnection Customer
3	Ambient Temperature	32767	-32768	327.67	-327.68	DEG C	Provided by Interconnection Customer
4	Wind Direction	32767	-32768	327.67	-327.68	Deg from North	Provided by Interconnection Customer
5	Wind Speed	32767	-32768	327.67	-327.68	M/S	Provided by Interconnection Customer
6	Relative Humidity	32767	-32768	TBD	TBD	%	Provided by Interconnection Customer
7	Global Horizontal Irradiance	32767	-32768	TBD	TBD	W/M^2	Provided by Interconnection Customer
8	Plane of Array Irradiance	32767	-32768	TBD	TBD	W/M^2	Provided by Interconnection Customer
9	SPARE						
10	SPARE						
11	SPARE						
12	SPARE						
13	SPARE						
14	SPARE						
15	SPARE						
16	SPARE						
17	SPARE						

Analog Outputs to Interconnection Customer (DNP Obj. 41, Var. 2)							
Index	Description	Raw High	Raw Low	EU High	EU Low	EU Units	Comments:
0	GOLC Setpoint	32767	-32768	TBD	TBD	MW	Control issued by IPC
1	Voltage Control Setpoint	32767	-32768	TBD	TBD	kV	Control issued by IPC
2	SPARE						
3	SPARE						
4	SPARE						
5	SPARE						
6	SPARE						
7	SPARE						
8	SPARE						
9	SPARE						

Table 10
BESS Generation Interconnection Supervisory Data Table.

Digital Inputs to IPC (DNP Obj. 01, Var. 2)			
Index	Description	State (0/1)	Comments:
0	GOLC Off/On (Control Feedback)	Off/On	Feedback provided by Interconnection Customer
1	52A Interconnection Customer Main Breaker (if present)	Open/Closed	Sourced at substation
2	52A Interconnection Customer Capacitor Breaker (if present)	Open/Closed	Sourced at substation

Digital Outputs to Interconnection Customer (DNP Obj. 12, Var. 1)		
Index	Description	Comments:
0	GOLC Off/On	Control issued by IPC
1	EMS COMM Off/On	Control issued by IPC

Analog Inputs to IPC (DNP Obj. 30, Var. 2)							
Index	Description	Raw High	Raw Low	EU High	EU Low	EU Units	Comments:
0	GOLC Setpoint Value Received (Feedback)	32767	-32768	TBD	TBD	MW	Provided by Interconnection Customer

Analog Inputs to IPC (DNP Obj. 30, Var. 2)							
Index	Description	Raw High	Raw Low	EU High	EU Low	EU Units	Comments:
1	Voltage Control Setpoint Value Rec'd (Feedback)	32767	-32768	TBD	TBD	kV	Provided by Interconnection Customer
2	Maximum Park Generating Capacity	32767	-32768	TBD	TBD	MW	Provided by Interconnection Customer
3	SPARE						
4	SPARE						
5	SPARE						
6	SPARE						
7	SPARE						
8	SPARE						
9	SPARE						
10	SPARE						
11	SPARE						
12	SPARE						
13	SPARE						
14	SPARE						
15	SPARE						
16	SPARE						
17	SPARE						

Analog Outputs to Interconnection Customer (DNP Obj. 41, Var. 2)							
Index	Description	Raw High	Raw Low	EU High	EU Low	EU Units	Comments:
0	GOLC Setpoint	32767	-32768	TBD	TBD	MW	Control issued by IPC
1	Voltage Control Setpoint	32767	-32768	TBD	TBD	kV	Control issued by IPC
2	SPARE						
3	SPARE						
4	SPARE						
5	SPARE						
6	SPARE						
7	SPARE						
8	SPARE						

Analog Outputs to Interconnection Customer (DNP Obj. 41, Var. 2)							
Index	Description	Raw High	Raw Low	EU High	EU Low	EU Units	Comments:
9	SPARE						

Revision History

Date	Author	Revisions
9/8/2025	Laura Nelson	Interconnection Facilities Restudy Report version 1.0 issued.
9/12/2025	Laura Nelson	Updated draft report to remove limited operations from the Estimated Milestones (Table 7) and update the Temporary Limited Operation section of the report. Version 1.1 issued.