GENERATOR INTERCONNECTION FEASIBILITY STUDY REPORT

for integration of the proposed

400 MW

(GI PROJECT #663)

to the

IDAHO POWER COMPANY ELECTRICAL SYSTEM

in

ADA COUNTY, IDAHO

for

Report v.0

October, 2022

OFFICIAL USE ONLY

Table of Contents

1.0	Int	roduction	3			
2.0	Sur	mmary	4			
3.0	Fea	sibility Cost Estimate	5			
4.0	-					
5.0						
6.0	Energy Resource Interconnection Service (ERIS)					
	6.1	Description of Substation/Transmission Facilities	7			
	6.2	Description of Distribution Facilities	7			
	6.3	Short Circuit Study Results	7			
	6.4	Electric System Protection Results and Grounding Requirements	8			
	6.5	Energy Resource Interconnection Service Cost Estimate	8			
7.0	Network Resource Interconnection Service (NRIS)					
	7.1	Description of Power Flow Cases	9			
	7.2	Network Resource Interconnection Service Transmission Upgrades	10			
	7.3	Network Resource Interconnection Service Cost Estimate	10			
8.0	Des	scription of Operating Requirements	11			
9.0	Cor	nclusion	12			
APF	END	IX A	13			
	A-1.	0 Method of Study	13			
	A-2.0	0 Acceptability Criteria	13			
	A-3.0	0 Grounding Guidance	14			
	A-4.0	0 Electrical System Protection Guidance	14			
		0 WECC Coordinated Off-Nominal Frequency Load Shedding and oration Requirements	14			

OFFICIAL USE ONLY

DO NOT DUPLICATE, DISTRIBUTE, PUBLISH OR SHARE

1.0 Introduction

has contracted with Idaho Power Company ("Transmission Provider") to perform a Generator Interconnection Feasibility Study for the integration of the proposed 400 MW (the Project). The Project location is in Idaho Power Company's (IPC's) Capital Region in Ada County, Idaho. The project is Generation Interconnect (GI) queue number 663 (GI #663). The Project has chosen in the Feasibility Study to be studied for Energy Resource Interconnection Service (ERIS) and Network Resource Interconnection Service (NRIS).

The Project has applied to connect to Idaho Power's transmission system for an injection of 400 MW at a Point of Interconnection (POI) at 230kV. The POI is the 230 kV line.

The Project is Solar Photovoltaic (PV) plus Battery Energy Storage System (BESS). Assuming the intent is also to be able to charge the BESS via IPC's transmission system, the project will need to submit an Idaho Power Energy Storage System load request.

IPC projects queue GI #610, GI #619, GI #622, GI #629, GI #632, GI #634, GI #635, GI #636, GI #638, GI #639, GI #640, GI #643, GI #645, GI #646, GI #649, GI #652, GI #656, and GI #659 are senior queued projects in the affected area of IPC's transmission system and their associated Network Upgrades and/or Interconnection Facilities may be contingent facilities. Should GI #663 elect to move forward into the System Impact Study phase the facilities that are contingent will be identified.

This report documents the basis for and the results of this Feasibility Study for the GI #663 Generation Interconnection Customer. The report describes the proposed Project, the determination of the Project interconnection requirements and estimated costs for integration of the Project to the Transmission Provider transmission system. This report satisfies the feasibility study requirements of the Idaho Power Tariff.

OFFICIAL USE ONLY

2.0 Summary

The Interconnection Feasibility Study was done and prepared in accordance with the Transmission Provider's Standard Generator Interconnection Procedures to provide a preliminary evaluation of the feasibility of the interconnection of the proposed generating Project to the Idaho Power system. As listed in the Interconnection Feasibility Study agreement, the Interconnection Feasibility Study report provides the following information:

- preliminary identification of any circuit breaker short circuit capability limits exceeded because of the interconnection;
- preliminary identification of any thermal overload or voltage limit violations resulting from the interconnection; and
- preliminary description and non-binding estimated cost of facilities required to interconnect the Large Generating Facility to the IPC System and to address the identified short circuit and power flow issues.

All other proposed Generation projects prior to this Project in the Generator Interconnect queue were considered in this study. A current list of these projects can be found in the Generation Interconnection folder located on the Idaho Power Oasis web site at the link provided here: http://www.oatioasis.com/ipco/index.html.

An Interconnection System Impact Study (SIS) is required to determine if any additional Interconnection Facilities or Network Upgrades are required to mitigate thermal, voltage, transient stability, and/or reactive margin issues. Energy Resource Interconnection Service and/or Network Resource Interconnection Service in and of themselves do not convey transmission service. In addition to Network Upgrades identified in the Interconnection System Impact Study:

- For Energy Resource Interconnection Service, the Interconnection Customer's ability to inject its Large Generating Facility output beyond the Point of Interconnection will depend on the existing capacity of Transmission Provider's Transmission System at such time as a transmission service request is made that would accommodate such delivery. The provision of firm Point-to-Point Transmission Service or Network Integration Transmission Service may require the construction of additional Network Upgrades.
- For Network Resource Interconnection Service, additional studies to reduce or eliminate congestion may be required and these studies may identify the need for additional upgrades. To the extent Interconnection Customer enters into an arrangement for long term transmission service for deliveries from the Large Generating Facility outside Transmission Provider's Transmission System, such request may require additional studies and upgrades in order for Transmission Provider to grant such request.

OFFICIAL USE ONLY

DO NOT DUPLICATE, DISTRIBUTE, PUBLISH OR SHARE

3.0 Feasibility Cost Estimate

The total "Energy Resource Interconnection Service" generation interconnection preliminary cost estimate to interconnect the Project to the primary study POI is as follows:

• Energy Resource Interconnection Service at proposed 230 kV POI - \$3,845,400

See Section 6.5 Energy Resource Interconnection Service Cost Estimate for the required facilities and cost breakdowns.

The total "Network Resource Interconnection Service" generation interconnection preliminary cost estimate to interconnect project is as follows:

- Network Resource Interconnection Service \$44,010,418
 - This does not include costs for any potential contingent facilities from senior queued GI #610, GI #619, GI #622, GI #629, GI #632, GI #634, GI #635, GI #636, GI #638, GI #639, GI #640, GI #643, GI #645, GI #646, GI #649, GI #652, GI #656, and GI #659 projects.

See Section 7.3 Network Resource Interconnection Service Cost Estimate for the required facilities and cost breakdowns. The cost estimate includes a 20% contingency and 6.25% overhead. These are cost estimates only and final charges to the customer will be based on the actual construction costs incurred. It should be noted that the preliminary cost estimates do not include the cost of the customer's owned equipment.

The schedule for designing, procuring, and constructing facilities will be developed and optimized during the Facility Study should the generation interconnection customer choose to move to that study phase of the interconnection process.

OFFICIAL USE ONLY

4.0 Potential Contingent Facilities

IPC projects queue GI #610, GI #619, GI #622, GI #629, GI #632, GI #634, GI #635, GI #636, GI #638, GI #639, GI #640, GI #643, GI #645, GI #646, GI #649, GI #652, GI #656, and GI #659 are senior queued projects in the affected area of IPC's transmission system. Idaho Power studied GI #663 with all Network Upgrades and Interconnection Facilities identified for senior queued projects (Potential Contingent Facilities). Changes to senior queued projects including in-service date and withdrawal from the queue, may trigger a restudy associated with GI #663. Should GI #663 elect to move forward into the System Impact Study phase the facilities that are contingent will be identified.

5.0 Description of Proposed Generating Project

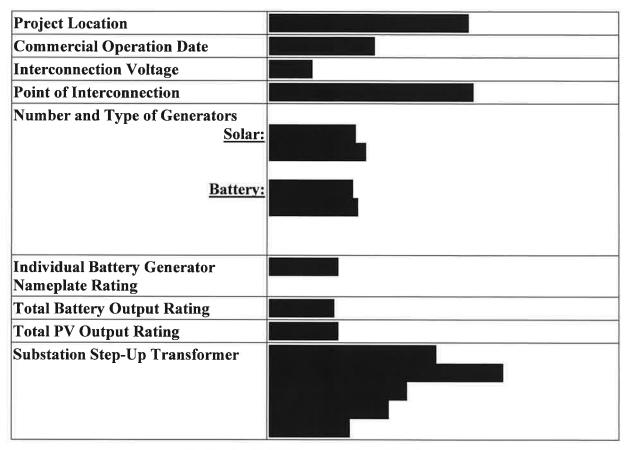


Table 1. GI #663 Project Specifications

OFFICIAL USE ONLY

DO NOT DUPLICATE, DISTRIBUTE, PUBLISH OR SHARE

6.0 Energy Resource Interconnection Service (ERIS)

Energy Resource Interconnection Service (ERIS) allows the Interconnection Customer to connect its Generating Facility to Transmission Provider's transmission system and to be eligible to deliver electric output using firm or non-firm transmission capacity on an as available basis.

The GI #663 Project has applied to connect to the Idaho Power transmission system for an injection of 400 MW with a new 230 kV interconnection at 230 kV line. All generation projects in the area ahead of this Project in the IPC generation queue and their associated transmission system improvements were modeled in a preliminary power flow analysis to evaluate the feasibility of interconnecting GI #663.

6.1 Description of Substation/Transmission Facilities

As an Energy Resource Interconnection Service, a Transmission Service Request will be required to determine the specific Network Upgrades required to deliver the Project output to a designated point of delivery. Listed below are the required transmission facilities to interconnect the Project:

• A three-position ring bus in the 230 kV line

The actual stations layout and detailed equipment requirements will be determined in the Facility Study should the interconnection customer choose to move to that study phase of the interconnection process.

6.2 Description of Distribution Facilities

No distribution facilities are directly impacted by this Project.

6.3 Short Circuit Study Results

The short circuit/fault duty at approximate GI #663 POI 230-kV bus location and adjacent buses was evaluated

Studies indicate that there is adequate load and short circuit interrupting capability on the Transmission Provider's existing 230kV breakers after this Project is interconnected.

OFFICIAL USE ONLY

DO NOT DUPLICATE, DISTRIBUTE, PUBLISH OR SHARE

6.4 Electric System Protection Results and Grounding Requirements

For 230 kV line protection, the Transmission Provider's System Protection Department utilizes permissive, and line differential protection schemes integrated with digital communication infrastructure. Digital communication infrastructure for the interconnection customer's 230-kV Interconnection Facilities will be the responsibility of said interconnection customer.

6.5 Energy Resource Interconnection Service Cost Estimate

In Table 4 below, a summary is provided of the facilities and conceptual costs required to interconnect the GI #663 Project to the Transmission Provider's transmission system.

GI #663 Project Energy Resource Interconnection Service Facilities			
ERIS Transmission Upgrades:	Cost		
Three-position Ring bus in 230 kV line	\$3,845,400		
ERIS – Total Estimated Cost (3)	\$3,845,400		

Table 4. Estimated GI #663 Energy Resource Interconnection Service Costs

- (1) Contingency is added to cover the unforeseen costs in the estimate. These costs can include unidentified design components, material cost increases, labor estimate shortfalls, etc.
- (2) Overhead costs cover the indirect costs associated with the Project.
- (3) This cost estimate includes direct equipment, material, labor, and overheads as shown.
 - Note that these estimates do not include the cost of the customer's equipment/facilities or required communication circuits for SCADA, PMU, and metering.
 - Note that the overhead rates are subject to change during the year.
 - Note that these costs assume the use of in-house resources.
 - These are estimated costs only and final charges to the customer will be based on the actual construction costs incurred.
 - These are non-binding conceptual level cost estimates that will be further refined upon the request and completion of the Facility Study.

7.0 Network Resource Interconnection Service (NRIS)

Network Resource Interconnection Service (NRIS) allows the Interconnection Customer to integrate its Generating Facility with the Transmission Provider's Transmission System in a manner comparable to that in which the Transmission Provider integrated its generating facilities to serve native load customers. The transmission system is studied under a variety of conditions to determine the transmission improvements/upgrades which are necessary.

OFFICIAL USE ONLY

DO NOT DUPLICATE, DISTRIBUTE, PUBLISH OR SHARE

The project exceeds Idaho Power's Most Severe Single Contingency (MSSC) of 330 MW and would be required to have a redundant tie-line and redundant collector system to prevent the tripping of the entire project of an N-1 condition.

7.1 Description of Power Flow Cases

For the Network Resource Interconnection Service study, three power flow cases were used to study the Transmission Provider's transmission system with westbound and eastbound transmission flows to determine the required Network Transmission Upgrades.

For the first and second case, the WECC 2023 Heavy Summer case was modified to represent a summer month with high west to east (eastbound) transfers across Idaho-to-Northwest.

For the second case, the WECC 2022 Light Winter case was modified to represent a shoulder month condition with high east to west (westbound) transfers across Idaho-to-Northwest.

For the third case, the WECC 2023 Heavy Summer case was modified to represent a summer month with high generation in the Mountain Home area

Power Flow Analysis was performed on the cases described above. The cases were used to simulate the impact of the proposed GI #663 400 MW Solar plus Storage Project interconnection during normal and contingency operating conditions (TPL-001). Mitigation of any adverse changes in loading or voltage from pre- to post-Project was identified.

The contingencies simulated include:

- All transformers and transmission lines in the local area of the proposed Project.
- Breaker Failures
- The proposed project.

The results of the power flow studies were evaluated using WECC/NERC planning standards and Idaho Power planning standards. The power flow analysis evaluation criteria that were used are summarized below:

- All transmission facilities must remain within their thermal limits.
- Pre-contingency bus voltages within the study area must be between 0.95 per unit and 1.05 per unit.
- Maximum voltage deviation allowed at all buses under contingency conditions will be 5% for N-1 (NERC Category B).

Power flow solution was achieved for all the N-1 and credible N-2 outages simulated.

Build a new 230-kV transmission line from
Rebuild the
Rebuild the
230 kV line with
conductor
conductor

OFFICIAL USE ONLY

DO NOT DUPLICATE, DISTRIBUTE, PUBLISH OR SHARE

7.2 Network Resource Interconnection Service Transmission Upgrades

From the power flow/contingency analysis, the following Network Transmission upgrades were identified for the integration of GI #663 in addition to the Energy Resource generation interconnection facilities. A System Impact Study will ultimately be required to determine the specific network upgrades required to integrate the Project.

•	Build a new 230-k	with	
	conductor	· · · · · · · · · · · · · · · · · · ·	
•	Rebuild	230 kV line with	conductor
•	Rebuild the	230 kV line with	conductor
•	Expand the intercor	nnection station to a four-position ring	bus to accommodate the
	redundant gen tie li	ne to the project	

IPC projects queue GI #610, GI #619, GI #622, GI #629, GI #632, GI #634, GI #635, GI #636, GI #638, GI #639, GI #640, GI #643, GI #645, GI #646, GI #649, GI #652, GI #656, and GI #659 are senior queued projects in the affected area of IPC's transmission system. Idaho Power studied GI #663 with all Network Upgrades identified for senior queued projects as in service (Potential Contingent Facilities). Changes to senior queued projects including inservice date and withdrawal from the queue, may trigger a restudy associated with GI #663 Network Resource, NR, service, (some or all of the network upgrades identified for senior queued projects may be required by GI #663).

7.3 Network Resource Interconnection Service Cost Estimate

Table 5 below is a summary of the Network Transmission generation interconnection facilities and conceptual costs required to interconnect the GI #663 Project to the Transmission Provider's transmission system for Network Resource Interconnection Service.

GI #663 Project Network Resource Interconnection Service Facilities				
NRIS Transmission Upgrades:	Cost			
Network Upgrades:				
Extra position in the ring bus for redundant tie-line	\$887,400			
	ductor \$39,277,618			

OFFICIAL USE ONLY

DO NOT DUPLICATE, DISTRIBUTE, PUBLISH OR SHARE

Rebuild approximately 1.8 miles of the 230 kV line	
ERIS – Total Estimated Cost	\$3,845,400
NRIS – Total Estimated Cost (1)	\$44,010,418

Table 5. Estimated GI #663 Network Resource Interconnection Service Costs

- (1) This cost estimate includes direct equipment, material, labor, and overheads as shown.
 - Note that these estimates do not include the cost of the customer's equipment/facilities or required communication circuits for SCADA, PMU, and metering.
 - Note that the overhead rates are subject to change during the year.
 - Note that these costs assume the use of in-house resources.
 - These are estimated costs only and final charges to the customer will be based on the actual construction costs incurred.
 - These are non-binding conceptual level cost estimates that will be further refined upon the request and completion of the Facility Study.

8.0 Description of Operating Requirements

The Project is PV plus BESS. Assuming the intent is also to be able to charge the BESS via IPC's transmission system, the project will need to submit an Idaho Power Energy Storage System load request.

GI #663 will be required to control voltage in accordance with a voltage schedule as provided by Idaho Power Grid Operations. GI #663 will be required to manage the real power output of their generation project at the POI. Also, it may be beneficial for the project for their own modeling compliance requirements, to install additional PMU devices at their facilities to monitor the generation source(s).

It is the generation Project's responsibility to provide reactive power capability of the Project to have a power factor operating range of at least 0.95 leading (absorbing) to at least 0.95 lagging (supplying) at the POI over the range of real power output (up to maximum output of the Project).

Identification of any additional equipment required at the plant to meet Idaho Power reactive power capability interconnection requirements will be provided in the System Impact Study if the generation interconnection customer chooses to move to the next study phase of the interconnection process.

OFFICIAL USE ONLY

DO NOT DUPLICATE, DISTRIBUTE, PUBLISH OR SHARE

The Project(s) is required to comply with the applicable Voltage and Current Distortion Limits found in the latest publication of the IEEE Standard 519 *IEEE Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems*.

Installation of phasor measurement unit devices at the POI and maintenance costs associated with communication circuits needed to stream PMU data will also be required to be provided to interconnect GI #663. The specific costs associated with the IPC requirements for interconnection customers with aggregate facilities larger than 20 MW to provide PMU data to IPC will be identified in the Facility Study should the generation interconnection customer choose to proceed to that phase of the interconnection process. Also, it may be beneficial for the project for their own modeling compliance requirements, to install additional PMU devices at their facilities to monitor the generation's sources separately.

Additional operating requirements for this Project may be identified in the System Impact Study when it is performed.

9.0 Conclusion

GI #663 can be interconnected to the Idaho Power transmission system with the identified upgrades.

Interconnection requirements detailed in Section 6.1 totaling \$3,845,400 are required to interconnect the Project for Energy Resource Interconnection Service (ERIS) at the proposed 230 kV line. If the Project interconnects for Network Resource Interconnection Service (NRIS), the cost to integrate the project is also \$44,010,418. Both the ERIS and NRIS may be reliant on facilities identified in senior queued generation interconnections.

A System Impact Study is required to determine the specific Transmission Network Upgrades required to integrate the Project for Network Resource Interconnection Service and to evaluate the system impacts (thermal overload, voltage, transient stability, reactive margin).

OFFICIAL USE ONLY

DO NOT DUPLICATE, DISTRIBUTE, PUBLISH OR SHARE

APPENDIX A

A-1.0 Method of Study

The Feasibility Study plan inserts the Project up to the maximum requested injection into the selected Western Electricity Coordinating Council (WECC) power flow case and then, using Power World Simulator or GE's Positive Sequence Load Flow (PSLF) analysis tool, examines the impacts of the new resource on Idaho Power's transmission system (lines, transformers, etc.) within the study area under various operating and outage scenarios. The WECC and Idaho Power reliability criteria and Idaho Power operating procedures were used to determine the acceptability of the configurations considered. The WECC case is a recent case modified to simulate stressed but reasonable pre-contingency energy transfers utilizing the IPC system. For distribution feeder analysis, Idaho Power utilizes DNV·GL's Synergi Electric software and EPRI's OpenDSS software.

A-2.0 Acceptability Criteria

The following acceptability criteria were used in the power flow analysis to determine under which system configuration modifications may be required:

The continuous rating of equipment is assumed to be the normal thermal rating of the equipment. This rating will be as determined by the manufacturer of the equipment or as determined by Idaho Power. Less than or equal to 100% of continuous rating is acceptable.

Idaho Power's Voltage Operating Guidelines were used to determine voltage requirements on the system. These state, in part, that distribution voltages under normal operating conditions are to be maintained within plus or minus 5% (0.05 per unit) of nominal everywhere on the feeder. Therefore, voltages greater than or equal to 0.95 pu voltage and less than or equal to 1.05 pu voltage are acceptable.

Voltage flicker during starting or stopping the generator is limited to 5% as measured at the point of interconnection, per Idaho Power's T&D Advisory Information Manual.

Idaho Power's Reliability Criteria for System Planning was used to determine proper transmission system operation.

All customer generation must meet IEEE 519 and ANSI C84.1 Standards.

All other applicable national and Idaho Power standards and prudent utility practices were used to determine the acceptability of the configurations considered.

The stable operation of the system requires an adequate supply of volt-amperes reactive (VAr or VArs) to maintain a stable voltage profile under both steady-state and dynamic system conditions. An inadequate supply of VArs will result in voltage decay or even collapse under the worst conditions.

Equipment/line/path ratings used will be those that are in use at the time of the study or that

OFFICIAL USE ONLY

DO NOT DUPLICATE, DISTRIBUTE, PUBLISH OR SHARE

are represented by IPC upgrade projects that are either currently under construction or whose budgets have been approved for construction in the near future. All other potential future ratings are outside the scope of this study. Future transmission changes may, however, affect current facility ratings used in the study.

A-3.0 Grounding Guidance

IPC requires interconnected transformers on the distribution system to limit their ground fault current to 20 amps at the Point of Interconnection.

A-4.0 Electrical System Protection Guidance

IPC requires electrical system protection per <u>Facility Connection Requirements</u> found on the Idaho Power Web site,

https://docs.idahopower.com/pdfs/BusinessToBusiness/FacConnReq.pdf

A-5.0 WECC Coordinated Off-Nominal Frequency Load Shedding and Restoration Requirements

IPC requires frequency operational limits to adhere to WECC Under-frequency and Over-frequency Limits per the <u>WECC Coordinated Off-Nominal Frequency Load Shedding and Restoration Requirements</u> available upon request.

OFFICIAL USE ONLY

DO NOT DUPLICATE, DISTRIBUTE, PUBLISH OR SHARE

Revision History

Date	Revision	Initials	Summary of Changes
10/13/2022	1	AVD	Initial Report

OFFICIAL USE ONLY

DO NOT DUPLICATE, DISTRIBUTE, PUBLISH OR SHARE