

**GENERATOR INTERCONNECTION
SYSTEM IMPACT STUDY REPORT**

for integration of the proposed

IPC PROJECT QUEUE #628

to the

IDAHO POWER COMPANY ELECTRICAL SYSTEM

for

Idaho Power Company

REPORT v.0

Feb, 2022

OFFICIAL USE ONLY

This report contains Idaho Power Company Critical Energy Infrastructure Information (CEII). Distribution of this report must be limited to parties that have entered into a non-disclosure agreement with Idaho Power Company and have a need to know.

Revision History

Date	Revision	Initials	Summary of Changes
2022	0	DLJ	SIS GI #628 – Original issue.

3.0 MW [REDACTED] Project
System Impact Study Report

i

OFFICIAL USE ONLY

This report contains Idaho Power Company Critical Energy Infrastructure Information (CEII). Distribution of this report must be limited to parties that have entered into a non-disclosure agreement with Idaho Power Company and have a need to know.

Table of Contents

1.0	Introduction.....	1
2.0	Summary	1
3.0	Scope of Interconnection Transmission System Impact Study.....	2
4.0	Description of Proposed Generating Project.....	3
5.0	Description of Transmission Facilities	3
6.0	Description of Power Flow Case	3
7.0	Power Flow Analysis Study Results	4
9.0	Description of Distribution Facilities.....	4
10.0	Short Circuit Study Results.....	5
11.0	Description of Required Facility Upgrades	5
12.0	Description of Operating Requirements	7
13.0	Conclusion	8
	APPENDIX A.....	9
	A-1.0 Method of Study	9
	A-2.0 Acceptability Criteria	9
	A-3.0 Grounding Guidance.....	10
	A-4.0 Electrical System Protection Guidance	10
	A-5.0 WECC Coordinated Off-Nominal Frequency Load Shedding and Restoration Requirements	10
	APPENDIX B.....	11

3.0 MW [REDACTED] Project
System Impact Study Report

OFFICIAL USE ONLY

This report contains Idaho Power Company Critical Energy Infrastructure Information (CEII). Distribution of this report must be limited to parties that have entered into a non-disclosure agreement with Idaho Power Company and have a need to know.

List of Tables

Table 1: GI #628 Short Circuit Currents, POI	5
Table 2: Conceptual-level Primary POI Cost Estimate for GI #628	6

List of Figures

Figure 1: Operating Requirements.....	7
Figure 2: [REDACTED] GI #628 Site Location.....	11
Figure 3: WESR Single Line	11
Figure 4: [REDACTED] GI #628 Substation Layout Location.....	11

1.0 Introduction

Idaho Power Company – Power Supply has contracted with Idaho Power Company (IPC) to perform a Generator Interconnection System Impact Study for the integration of the proposed 3.0 MW [REDACTED] project (the Project). The Project is located in IPC's [REDACTED] at [REDACTED]. The Project is Generation Interconnect queue number 628 (GI #628).

The Project has applied to connect to the IPC distribution system for an injection of 3.0 MW at a single Point of Interconnection (POI) at a [REDACTED] distribution voltage level. The POI is located at the Weser (WESR) Substation at [REDACTED].

This report documents the basis for and the results of this system impact study for the GI #628 Generation Interconnection Customer. The report describes the proposed project, the determination of project interconnection feasibility and estimated costs for integration of the Project to the Idaho Power System. This report satisfies the feasibility study requirements of the Idaho Power Tariff.

2.0 Summary

The system impact of interconnecting the 3.0 MW Project to IPC's WESR Substation was evaluated.

The [REDACTED] will connect to the WESR [REDACTED] in the WESR Substation.

The preliminary power flow analysis indicated that interconnecting the Project to the WESR Substation will not adversely impact the IPC system with the upgrades detailed in this report. Additionally, Operating Requirements will require the generator to provide leading and lagging reactive power as detailed in section 12.0 of this report.

The Project will be required to control voltage in accordance with a voltage schedule as provided by Idaho Power Grid Operations.

Generator interconnection service, either as an Energy Resource or a Network Resource, does not in any way convey any right to deliver electricity to any specific customer or point of delivery.

The total preliminary cost estimate to interconnect the [REDACTED] project to the primary POI at [REDACTED] at the WESR Substation is \$ 802,401 and includes the following tasks:

- Substation Upgrades:
 - Two 150 kVA axillary power transformer
 - Install a [REDACTED] generation interconnection package at the POI
 - This includes an SEL-651 protective relay, which requires 3-phase PTs, 3-phase CTs, and remote connectivity
 - Install new load tap changer (LTC) controls on the substation transformer for generation reverse power flow.

The cost estimate includes direct equipment and installation labor costs, indirect labor costs and general overheads. These are cost estimates only and final charges to the customer will be based on the actual construction costs incurred. It should be noted that the preliminary cost estimates do not include the cost of the customer's owned equipment to construct the generation site or required communication circuits.

3.0 Scope of Interconnection Transmission System Impact Study

The Interconnection Transmission System Impact Study was completed, in accordance with Idaho Power Company Standard Generator Interconnection Procedures, to provide an evaluation of the system impacts of the interconnection of the proposed generating Project to the Idaho Power system. As listed in the Interconnection Transmission System Impact Study agreement, the Interconnection Transmission System Impact Study report provides the following information:

- identification of additional transformer load tap changer operations, voltage fluctuations (flicker) and additional feeder losses.
- identification of required reactive power support.
- identification of islanding conditions.
- identification of any circuit breaker short circuit capability limits exceeded as a result of the interconnection.
- identification of any thermal overload or voltage limit violations resulting from the interconnection.
- description and non-binding estimated cost of facilities required to interconnect the Small Generating Facility to the IPC System and to address the identified short circuit and power flow issues.

All other proposed generation Projects prior to this Project in the Generator Interconnect queue were considered in this study. A current list of these Projects can be found in the Generation Interconnection folder located on the Idaho Power web site at the link shown below:

<http://www.oatioasis.com/ipco/index.html>.

4.0 Description of Proposed Generating Project

██████████, GI #628, consists of a single POI with a 3.0 MW BESS inverter and has requested to connect to Idaho Power's ██████████ substation bus. The Project requested that 3.0 MW total injection at the POI be studied.

5.0 Description of Transmission Facilities

The Project, GI #628, is in IPCO's ██████████ load serving area with the POI on the distribution system at the Weiser Substation. The Weiser Substation is fed by 138 kV transmission and 69 kV sub transmission systems.

6.0 Description of Power Flow Case

The Project was studied using DNV Synergi load flow analysis software to analyze the impact to the WESR Substation. The Project was studied at peak load and minimum load conditions with all generators on the feeder generating at 100% output.

The Project was also reviewed for potential impacts on the IPC transmission system. This study utilized the WECC approved 22HS2 case as the starting point for the power flow case. For the purposes of transmission system impacts, the Project was modeled on the 69 kV bus serving Weiser Substation an Energy Resource Interconnection Service. Senior GI queue projects were modeled at their rated capacity.

The power flow case was used to study the impact to the local transmission system. The limits used for this analysis are as follows:

1. Voltage magnitude during normal operating steady-state must remain between 0.93 per unit and 1.05 per unit. If the post-transient voltage deviates from this range during N-1 conditions and an operating procedure can be taken to return the voltage to the required range without creating a four-terminal line, then network upgrades are not required.
2. Line loading must be less than 100% of line rating during normal steady-state operation. Steady-state line loading above 100% requires network upgrades.
3. Post-transient line overloading that does not exceed the emergency line rating resulting from an N-1 contingency is acceptable if an operating procedure can be taken to reduce the line loading below 100% without creating a four-terminal line.
4. Post-transient line loading above the emergency line rating resulting from an N-1 contingency requires network upgrades.

3.0 MW ██████████ Project

System Impact Study Report

3

OFFICIAL USE ONLY

This report contains Idaho Power Company Critical Energy Infrastructure Information (CEII). Distribution of this report must be limited to parties that have entered into a non-disclosure agreement with Idaho Power Company and have a need to know.

7.0 Power Flow Analysis Study Results

There are no required upgrades to the distribution system. The BESS will connect directly into distribution substation bus and voltages will operate within operational guidelines, even during periods of light load and peak project output. There may be voltage concerns that can be resolved with substation transformer regulator operational adjustments. Regional engineering will verify and adjust as necessary.

The impact of the proposed Project on the IPC transmission system was analyzed. Energy Resource Interconnection Service allows the Interconnection Customer to connect its Generating Facility to a Transmission Provider's transmission system and to be eligible to deliver electric output using firm or non-firm transmission capacity on an as available basis.

Results from the studies performed indicate the addition of The Project will not result in N-1 contingency violations impacting either transmission path or any local transmission system elements.

8.0 Description of Substation Facilities

Idaho Power's WESR Substation is located in ██████ County, Idaho. WESR Substation is fed by a 138 kV tap line and networked 69 kV transmission. The substation transformer, WESR T-061, is a three-phase 69-█████ delta wye-grounded transformer rated for 14 MVA. WESR T-061 currently serves four ██████ distribution feeders: ██████.

9.0 Description of Distribution Facilities

The Project was studied with a ██████ connection to WESR Substation bus. This is a grounded-wye bus operating at ██████. The Project must have a grounded-wye transformer connection on the IPC side, as well as a delta connection on the Project side of the transformer.

Refer to Appendix A, Section 3, for additional grounding requirements.

10.0 Short Circuit Study Results

Fault Study: WESR ██████ BUS				
Configuration	SLG (A)	3I0 (A)	LTL (A)	3PH (A)
Existing System	5696.0	5696.0	4398.9	6298.5
Add 3MW BESS	7887.3	7887.3	6261.7	8450.5

*NOTE: All WESR feeder breakers are rated at ██████ interrupt. Addition of 3MW of BESS to ██████ bus does not exceed breaker ratings.

Table 1: GI #628 Short Circuit Currents, POI

The protection package will include a SEL-421/breaker package connected to the open-air substation ██████ bus.

The fault current contribution from the BESS does not exceed any circuit breaker rating.

11.0 Description of Required Facility Upgrades

The following upgrades will be required to IPC-owned facilities to facilitate the interconnection of GI #628:

- Substation Upgrades:
 - Two 150 kVA axillary power transformer, one for each battery system
 - Install a ██████ generation interconnection package at the POI
 - This includes an SEL-651 protective relay, which requires 3-phase PTs, 3-phase CTs, and remote connectivity
 - Install new load tap changer (LTC) controls on the substation transformer for generation reverse power flow.

See the conceptual-level cost estimate in Table 1.

Item of Work	Estimate
Substation, Generation interconnection, and protection package	\$ 623,466
Distribution upgrades	\$ 0
Transmission upgrades	\$ 0
Unloaded costs (1)	\$ 623,466
20% Contingency	\$ 124,693
Total unloaded costs	\$ 748,159
Overheads (2)	\$ 54,242
Total Conceptual-level Cost Estimate in 2022 dollars (3)	\$ 802,401

Table 2: Conceptual-level Primary POI Cost Estimate for GI #628

(1) This cost estimate does not include any contingency to cover unknown events and occurrences or any changed circumstances. Idaho Power typically applies a contingency that ranges from 10-30% of the project cost, depending on the intricacies of the project and the status of the design, but no such amount is included in this cost estimate. Actual costs could deviate from the estimate.

(2) Overhead costs cover the indirect costs associated with the Project.

(3) This cost estimate includes direct equipment, material, labor, overheads, and contingency as shown.

- Note that this estimate does not include the cost of the customer's equipment/facilities.
- Note that the overhead rates are subject to change during the year.
- These are estimated costs only and final charges to the customer will be based on the actual construction costs incurred.
- These are non-binding conceptual level cost estimates that will be further refined upon the request and completion of Transmission and Distribution Facility Studies.

3.0 MW [REDACTED] Project

System Impact Study Report

OFFICIAL USE ONLY

This report contains Idaho Power Company Critical Energy Infrastructure Information (CEII). Distribution of this report must be limited to parties that have entered into a non-disclosure agreement with Idaho Power Company and have a need to know.

12.0 Description of Operating Requirements

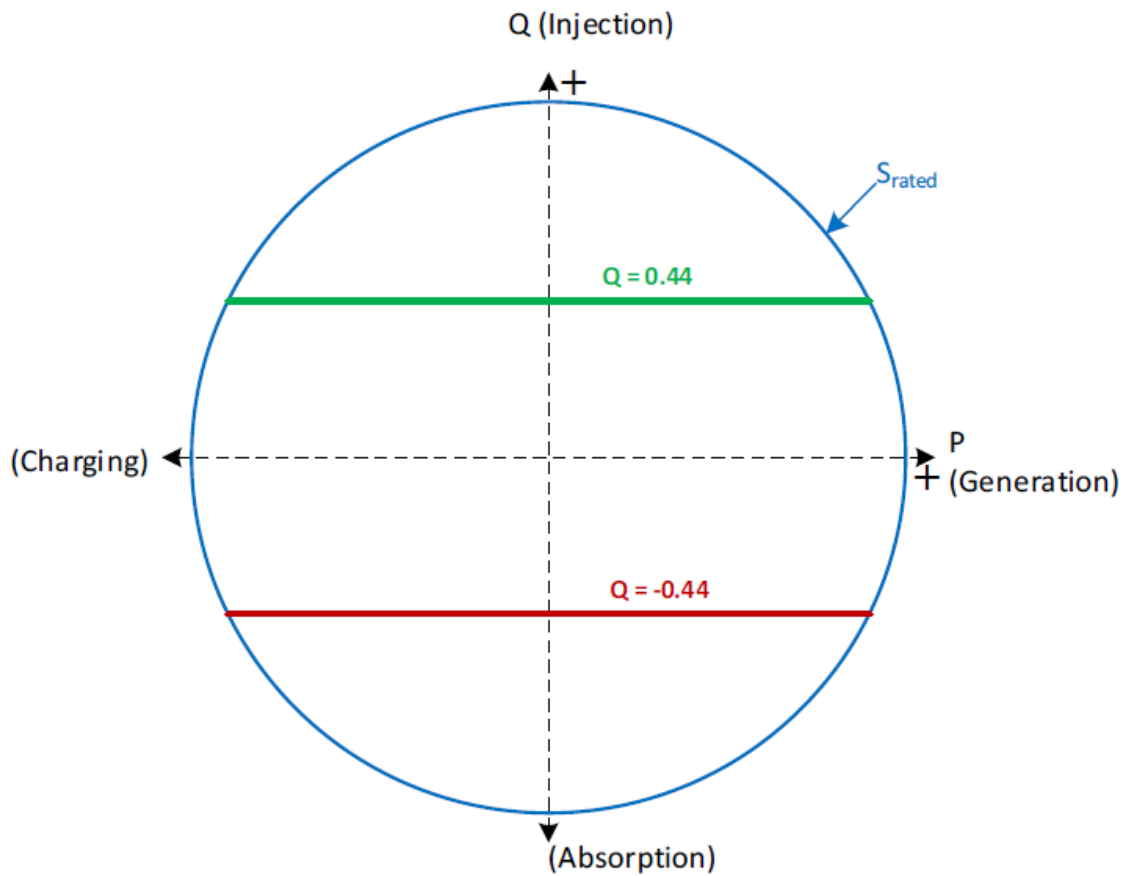


Figure 1: Operating Requirements

The Project shall be capable of operating in all four quadrants of the PQ plane. Figure 1 illustrates operating in the PQ plan with varying source voltage with Q(V) and P(V) functions enabled. The project shall be capable then of injecting reactive power (over-excited) equal to 1320 kVAr and absorbing reactive power (under-excited) equal to 1320 kVAr at all active power output between +/-100% of nameplate active power rating (whether charging or generating).

The Project will be required to control voltage in accordance with a voltage schedule and control charging in accordance with a load schedule as provided by Idaho Power Grid Operations.

3.0 MW [REDACTED] Project

System Impact Study Report

7

OFFICIAL USE ONLY

This report contains Idaho Power Company Critical Energy Infrastructure Information (CEII). Distribution of this report must be limited to parties that have entered into a non-disclosure agreement with Idaho Power Company and have a need to know.

Voltage flicker at startup and during operation will be limited to less than 5% as measured at the POI. The allowable voltage flicker limit is further reduced during operation due to multiple voltage fluctuations per hour or minute, per Idaho Power's T&D Advisory Information Manual.

The Project is required to comply with the applicable voltage fluctuation limits found in IEEE Standard 1453-2004 *IEEE Recommended Practice for Measurement and Limits of Voltage Fluctuations and Associated Light Flicker on AC Power Systems*.

The Project is required to comply with the applicable Voltage and Current Distortion Limits found in IEEE Standard 519-2014 *IEEE Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems*.

Additional operating requirements for the Project may be identified in the System Impact Study when it is performed.

13.0 Conclusion

The requested interconnection of the [REDACTED] Project, GI #628, to Idaho Power's system was studied. The Project will interconnect to WESR Substation [REDACTED] bus.

The results of this study confirm that GI #628, [REDACTED] will not adversely impact the IPC system with the upgrades detailed in this report. A generation interconnect package at the POI is required to integrate the 3.0 MW project. Operating Requirements will require the generator to provide leading and lagging reactive power as detailed in section 12.0 of this report.

All generation Projects in the area ahead of the Project in the IPC generation interconnection queue and their associated transmission system improvements were included in this study.

The estimated cost to interconnect GI #628 to the IPC system at the WESR [REDACTED] bus in the WESR Substation POI considered in this study is approximately \$802,401.

Generator interconnection service, either as an Energy Resource or a Network Resource, does not in any way convey any right to deliver electricity to any specific customer or point of delivery.

APPENDIX A

A-1.0 Method of Study

The Transmission System Impact Study plan inserts the Project up to the maximum requested injection into the selected Western Electricity Coordinating Council (WECC) power flow case and then, using Power World Simulator or GE's Positive Sequence Load Flow (PSLF) analysis tool, examines the impacts of the new resource on Idaho Power's transmission system (lines, transformers, etc.) within the study area under various operating and outage scenarios. The WECC and Idaho Power reliability criteria and Idaho Power operating procedures were used to determine the acceptability of the configurations considered. The WECC case is a recent case modified to simulate stressed but reasonable pre-contingency energy transfers utilizing the IPC system. For distribution feeder analysis, Idaho Power utilizes DNVGL's Synergi Electric software.

A-2.0 Acceptability Criteria

The following acceptability criteria were used in the power flow analysis to determine under which system configuration modifications may be required:

The continuous rating of equipment is assumed to be the normal thermal rating of the equipment. This rating will be as determined by the manufacturer of the equipment or as determined by Idaho Power. Less than or equal to 100% of continuous rating is acceptable.

Idaho Power's Voltage Operating Guidelines were used to determine voltage requirements on the system. This states that, in part, distribution voltages, under normal operating conditions, are to be maintained within plus or minus 5% (0.05 per unit) of nominal at each meter or POI on the feeder. Therefore, voltages greater than or equal to 0.95 pu voltage and less than or equal to 1.05 pu voltage are acceptable.

Voltage flicker during the starting or stopping of the generator will be limited to less than 5% as measured at the POI. Allowable voltage flicker limit is further reduced during operation due to multiple voltage fluctuations per hour or minute, per Idaho Power's T&D Advisory Information Manual.

Idaho Power's Reliability Criteria for System Planning was used to determine proper transmission system operation.

All customer generation must meet IEEE 519, IEEE1453, IEEE1547, and ANSI C84.1 Standards.

All other applicable national and Idaho Power standards and prudent utility practices were used to determine the acceptability of the configurations considered.

3.0 MW [REDACTED] Project

System Impact Study Report

9

OFFICIAL USE ONLY

This report contains Idaho Power Company Critical Energy Infrastructure Information (CEII). Distribution of this report must be limited to parties that have entered into a non-disclosure agreement with Idaho Power Company and have a need to know.

The stable operation of the system requires an adequate supply of volt-amperes reactive (VARs) to maintain a stable voltage profile under both steady-state and dynamic system conditions. An inadequate supply of VARs will result in voltage decay or even collapse under the worst conditions.

Equipment/line/path ratings used will be those that are in use at the time of the study or that are represented by IPC upgrade Projects that are either currently under construction or whose budgets have been approved for construction in the near future. All other potential future ratings are outside the scope of this study. Future transmission changes may, however, affect current facility ratings used in the study.

A-3.0 Grounding Guidance

IPC requires interconnected transformers on the distribution system to limit their ground fault current to 20 amps at the Point of Interconnection.

A-4.0 Electrical System Protection Guidance

IPC requires electrical system protection per Requirements for Generation Interconnections found on the Idaho Power Web site,

<https://docs.idahopower.com/pdfs/BusinessToBusiness/FacConnReq.pdf>

A-5.0 WECC Coordinated Off-Nominal Frequency Load Shedding and Restoration Requirements

IPC requires frequency operational limits to adhere to WECC Under-frequency and Over-frequency Limits per the WECC Coordinated Off-Nominal Frequency Load Shedding and Restoration Requirements available upon request.

APPENDIX B

Figure 2: [REDACTED] GI #628 Site Location

Figure 3: WESR Single Line

Figure 4: [REDACTED] GI #628 Substation Layout Location